



Intelligent power distributor, suitable for applications in temporary and permanent installations.

For maximum operating reliability of all connected equipment and smallest possible cut-offs the PD-32-6 V2 is equipped with novel fault current management systems.

Standard power distributors have one residual-current-operated protective device (RCD) only. Each cut-off affects the whole system and all power for all devices is off. The PD-32-6 V2 features six independent circuits (RCBO) which allows to switch off only the defective circuit and all other equipments remains online – The show can go on.


Big advantage is that possible errors can be spotted more easy as only the switched off equipment has to be monitored. A multimeasuring tool is also included to make mistake spotting even more easy and faster.

The built-in Run-time counter is essential in rental business and helps checking the real run-time of your equipment and checking the right maintenance periods.

In all three versions it has a 32 A CEE input with permanently connected 2 m cable H07RN-F 5G6 and a 32 A CEE output. Further outputs are designed as 6 x Schuko hinged cover sockets, and in parallel either 6 x Neutrik powerCON, 6 x Neutrik powerCON TRUE1, or 1 x Multipin ILME 16 pin. The Schuko hinged lid sockets can optionally be replaced by Swiss T23 standard or French/Belgian Schuko.

The PD-32-6 V2 power distributor is housed in a 19"/3HE housing.

One PD-32-6 V2 can power six HDSP-6 system amplifiers. The power distributor can use the same stack-rack system as the amplifier and can connected with the internal stack rack mechanism to a tower on the special stack rack wheelboard.

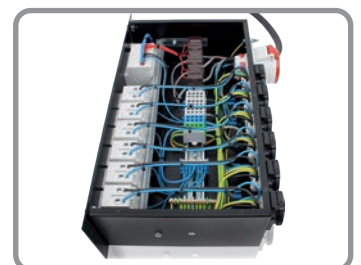

<b>IN</b>	32 A CEE Mennekes connector with 2 m cable (H07RN-F5G6)
<b>OUT</b>	1 x Output CEE 32 A 400 V Mennekes, 5p. 6 h 6 x Schuko Mennekes
<b>Model 1</b>	6 x Neurik powerCON TRUE1 NAC3FPX (parallel zu Schuko)
<b>Model 2</b>	6 x Neurik powerCON (grau) NAC3MPB-1 (parallel zu Schuko)
<b>Model 3</b>	1 x Multipin ILME 16 pol.
<b>Protection</b>	6 x RCBO C 16 A 1p./0.03 A from ABB
<b>Other</b>	3 x phase light 1 x multifunction measuring instrument 1 x earth screw Internal cabling cabling with 6 and 2,5 qmm wire
<b>Body housing</b>	19"/3 HE, 260 mm deep, strong black colored steel housing
<b>Weight</b>	15,6 kg