

The Score-5 is a compact and powerful multifunctional loudspeaker for mobile applications and installation equipped with 2 x 5"/1" drivers. The high-quality and fully phase optimized passive crossover with full equalisation allows for use with any amplifier.

The Score-5 is a fullrange system to enable speech and background music application without additional subs. Together with one of our subwoofers it turns into an elegant high-power PA.


During development great care was taken to achieve a precise 70° x 55° directivity pattern. The 55° vertical focusing is extended downward into the lowmids through a D'Appolito arrangement of the 5" woofers and their acoustic coupling. Compared with other speakers of this size, This provides the Score-5 with a farther throw and better speech intelligibility due to the higher direct sound ratio.

Parallel sidewalls and narrow front dimensions (172 mm width) make it perfect for nearfill application on stage edges or concealed in interior panelling or staircases. Cabinet angles of 25° and 55° allow for flexible monitor use. Sound technicians will appreciate the linear frequency response and neutral sound alignment which results in high gain-before-feedback and an overall easier job.

The elegant and unobtrusive multifunctional brackets can be attached horizontally or vertically with Camlock connectors within seconds. These connectors are proved and tested for rigging of Movingheads in event technology business. Via bracket and tube adapter Score-5 can be easily angled on a tilting pole socket in any direction. There are no modifications necessary for flying. The tube adapter has to be removed from the bracket and the speaker can be directly fixed to a truss. A mandatory safety with stud can be click-locked into the steel panel on the back.

The same area also provides two M6 fixing points for a rotatable and tilttable wallmount. There is another M8 thread to fix the Score-5 with the least possible gap to a truss by using a super clamp or bracket. There is even a small concealed handle on the backside for ease of use.

All these sophisticated details and the available accessories make the Score-5 an ideal tool for almost any application.

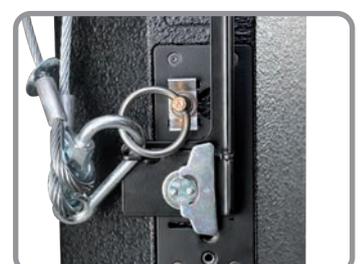

Frequency range	71 Hz - 19 kHz (- 10 dB) 139 Hz - 15,7 kHz (+/- 3 dB)
Coverage range	70° horizontal, 55° vertical
Powerhandling 12 Ω	200 W AES / 400 W program / 800 W peak
Sound pressure	114 dB SPL AES / 117 dB SPL program / 120 dB SPL peak
Components	2 x 5" Neodym LF with 32 mm (1,25") voice coil 1 x 1" Ferrit compression driver with 1" voice coil
Connectors	2 x Neutrik NL4 Speakon IN/OUT (durchgeschliffen), Belegung: 1+/1-
Mounting	1 x Camlock for tilt and swivel multifunctional brackets 1 x single-stud mount in the metal connection panel for safety rope 2 x M6 threaded points for rear, adjustable wall brackets 1 x M8 thread point for mounting a rear crosspiece clamp
Dimensions/Weight	450,5 (h) x 172 (w) x 190 mm (d) / 6,1 kg